


- ◆ Unilin Installation System
- ◆ 3-Coat Urethane Finish
- ◆ Attached Cork Underlay
- ◆ Honeycomb Structure
- ◆ Environmental Friendly

# Belgium Blocked

CORK

10.5mm Cork Panel - 36"x12"x7/16"

8 pcs/ctn | 23 sf/ctn | 36 ctn/pal | 29 pal/cont

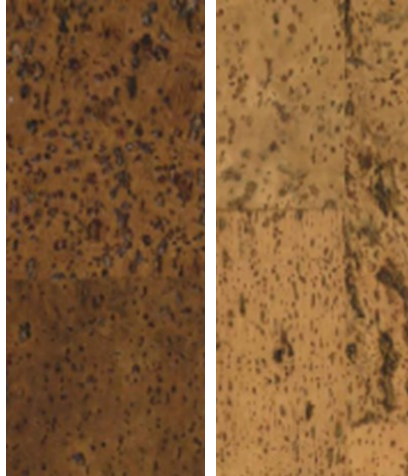

WIBL69008  
Mocha

WIBJ21049  
Natural

## Features

## Benefits

- |                                    |   |                                      |
|------------------------------------|---|--------------------------------------|
| Unilin locking installation system | ➡ | Fast & easy installation             |
| 3-coat urethane finish             | ➡ | Durable                              |
| Attached cork underlay             | ➡ | Quiet, optimum sound reduction       |
| Highly flexible cell membranes     | ➡ | Resilient & compressible             |
| Honeycomb structure                | ➡ | Resistant to wear, impact & friction |
| Suberin presence                   | ➡ | Impermeable to both liquids & gases  |
| Made of renewable raw material     | ➡ | Environmental friendly               |

### Installation Basics

Store planks at room temperature for least 48 hours prior to installation

Room temperature must be at least 65°F before & during installation

All substrates must be sound, dry, clean and smooth

Allow for at least 20 cm overlapping & tape when laying PE film for moisture protection

Provide 10mm expansion gaps to the walls and other fixed objects

**Read and Follow Complete Instructions**



5 year  
Residential  
Warranty



Distributed By:

**PACIFIC MAT**

RESIDENTIAL | COMMERCIAL | MATTING

1.800.345.6287 | [www.pacmat.com](http://www.pacmat.com) | [info@pacmat.com](mailto:info@pacmat.com)

December 2013

